

Reliable services at
SIAM KUBOTA standard



2-years or 600-hours limited warranty
The limited warranty for KUBOTA Rice Transplanter is eligible for 2 years or 600 hours (whichever comes first).
Read more details in the operation manual and the warranty book.



Free 4 inspection services for your rice transplanter
Within 2 years from the product delivery date.



SIAM KUBOTA Service Hotline 1747
Give advice on operation, maintenance, technical problems, and service appointment. Available daily from 7.00 - 19.00 without any days off.

คู่มือตัวเซอร์วิส แคร์

KUBOTA Service Care
Offers inspection service for KUBOTA Rice Transplanters that are out of warranty coverage, including free checkup privilege and discounts on spare parts as specified by SIAM KUBOTA.



SIAM KUBOTA Service Center
Comprehensive after-sales services are provided with standardized KUBOTA service centers and authorized dealers nationwide.



KUBOTA Genuine Spare Parts
A selection of over 80,000 KUBOTA Genuine Spare Parts is available at authorized dealers nationwide and KUBOTA Store.



KUBOTA VIP Program
Exclusive privileges customers who purchased KUBOTA Rice Transplanter:
• Up to 20% off on spare parts
• Complimentary gifts on special occasions



SIAM KUBOTA Leasing
Being an owner of KUBOTA Rice Transplanter has never been this easy with advices and credit services with fair interest rate, including various down payment options to meet your needs. Tel. 1317



SIAM KUBOTA Corporation Co., Ltd.
101/19-24, Moo 20, Navanakorn Industrial Estate,
Tambon Khlongnueng Amphur Khlongluang,
Pathumthani , Thailand12120
Tel. +66 (0) 2909 0300 Fax. +66 (0) 2909 1698
Published in March 2025
www.siamkubota.co.th | Siam Kubota



Scan the QR Code to watch the demonstration video.

KUBOTA Rice Transplanter *KW4 / KW6-M* Specification

Model Name		4-Rows Walk-Behind Type KW4		6-Rows Walk-Behind Type KW6-M	
Machine dimensions					
Overall length	(mm)	2,140		2,390	
Overall width	(mm)	1,630		2,280 (with sliding rail in storage position: 1,930)	
Overall height	(mm)	900		885	
Base machinery mass	(kg)	169		195	
Engine					
Model name		MZ200			
Type		Single-cylinder OHV gasoline engine			
Total engine displacement (L (cc))		0.192 (192)			
Maximum output / rotational speed (HP / rpm)		5.0 / 3,000		5.6 / 3,600	
Usable fuel		Regular automobile gasoline (unleaded)			
Fuel consumption rate (L / rail)		0.75 - 1.0		0.5 - 0.8	
Fuel tank capacity (L)		10			
Ignition system		Ignition coil			
Starter system		Manual starter (recoil type)			
Movement system					
Wheel control		Hydraulic system (moving wheels up / down)			
Wheel type		Thick rimmed rubber wheels			
Wheel outer diameter (mm)		660			
Planting speed (m / s)		0.47 - 0.85			
Number of gears		2 Forward (1 for planting) / Reverse			
Planting system					
Number of planting rows (rows)		4		6	
Planting row spacing (cm)		30			
Planting hill space (cm)		14, 16, 18, 21, 25, 28			
Number of hills (hills / m ²)		28, 24, 21, 19, 16, 13, 12		24, 21, 19, 16, 12, 9	
Seedling quantity per hill adjustment					
Planting depth (cm)		5 settings (0.7 - 3.7)			
Crossfeed distance (mm / revolution)		2 settings (10.3 / 26 , 13.4 / 20)			
Scraping depth (mm)		9 settings (7 - 17)			
Mat seedling					
Mat seedling dimension (cm)		28 x 58			
Seedling height (cm)		10 - 25			

Kubota

Agri-Innovation For The Future

KUBOTA Walk-behind Type Rice Transplanter

KW4 / KW6-M

Easy control for hard work



KUBOTA 4-Rows and 6-Rows Walk-Behind Type Rice Transplanter

Save your money, save your labor

Latest, attractive design

The new orange machine design is equipped with the LED working light for improved visibility at night.

Planting to your needs



The hill spacing is adjustable up to 6 ranges: 14, 16, 18, 21, 25, and 28 cm.



Seedling quantity per hill is up to 3-8 seedling / hill. The planting depth is adjustable in 5 settings from 0.7 - 3.7 cm.



Auto Monroe System (Automatic balance stabilization system)

Maintains the balance of your machine so that it does not tilt to one side in rough terrains (for Walk-Behind Type Rice Transplanter KW6-M only).

*Test result from 4-rows walk behind type rice transplanter KW4 model in November 2020 with the field conditions of 2,400 m² in area and 25-30 cm in depth. **Test result from 6-rows walk behind type rice transplanter KW6-M model in August 2020 with the field conditions of 4,500 m² in area and 12-15 cm in depth. Both models are tested by KUBOTA Corporation, Japan, at KAMS testing site in China. The machine performance depends on the field conditions, field dimensions, and user's proficiency.

KW6-M

KW4


Mobile operation




The machine height can be adjusted with a hydraulic system to navigate over steep ridges.



Zero-turning radius and hand steering system offer mobility even in the smallest field.

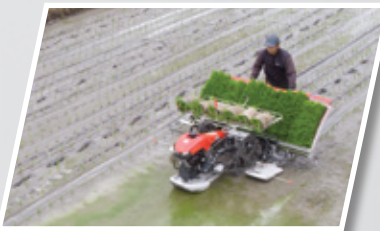

Lightweight with only 169 kg (KW4 model) and 195 kg (KW6-M model) to guarantee easy turning, ease of operation, and transporting convenience.

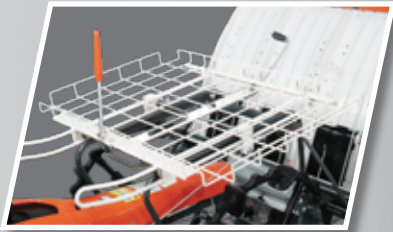

Spare seedling platform is adjustable up to 3 levels. Filling up the seedling platform is convenient and easy.

Continuity and Stability



OHV (Overhead valves) gasoline engine with 5 HP output (KW4) delivers 7-13 rai / day* and 5.6 HP output (KW6-M) delivers 10-18 rai / day.**



Transplant in rows with the maximum planting speed of 0.85 m / s.* / **



10 Liters fuel tank capacity enables continuous work.



Vertical feed belt system with front width of 176 mm (KW4) and 180 mm (KW6-M) expand surface of seedling platform for continuous and consistent feeding.



KUBOTA Mat Seed Center

Enjoy the convenience and reliability of high-quality mat seeds from SIAM KUBOTA, available at 45 mat seed centers nationwide.

For inquiries or to purchase mat seedling, please contact us Tel. +66 (0)-2029-1747.



Scan to view details on KUBOTA Mat Seedling Centers